


Cu KONCOVKY - DIN

LMWP.../... - spojka DIN, s prep., reduk.

Materiál: Cu
 Povrchová úprava: nepocínované
 Napätie: >1kV

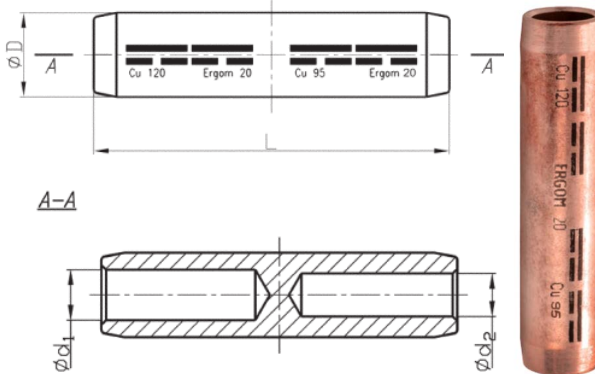

Tovar
na objednávku

TYP	Prierez (mm ²)		Rozmery (mm)				Počet lisov		Číslo hniezda	Balenie (ks)	Číslo produktu
	d ₁ (mm, sm)	d ₂ (mm, sm)	d ₁	d ₂	D	L	úzke	široké			
LMWP 25/16	25	16	7,0	5,5	10,0	65	2-2	1-1	10	10	4.0225400
LMWP 35/25	35	25	8,2	7,0	12,5	65	2-2	1-1	12	10	4.0225410
LMWP 50/25	50	25	10,0	7,0	14,5	75	3-3	1-1	14	10	4.0225420
LMWP 50/35	50	35	10,0	8,2	14,5	75	3-3	1-1	14	10	4.0225430
LMWP 70/35	70	35	11,5	8,2	16,5	75	3-3	1-1	16	10	4.0225440
LMWP 70/50	70	50	11,5	10,0	16,5	75	3-3	1-1	16	10	4.0225450
LMWP 95/50	95	50	13,5	10,0	19,0	91	4-4	2-2	18	10	4.0225460
LMWP 95/70	95	70	13,5	11,5	19,0	91	4-4	2-2	18	10	4.0225470
LMWP 120/70	120	70	15,5	11,5	21,0	95	4-4	2-2	20	10	4.0225480
LMWP 120/95	120	95	15,5	13,5	21,0	95	4-4	2-2	20	10	4.0225490
LMWP 150/95	150	95	17,0	13,5	23,5	105	4-4	2-2	22	10	4.0225500
LMWP 150/120	150	120	17,0	15,5	23,5	105	4-4	2-2	22	10	4.0225510
LMWP 185/120	185	120	19,0	15,5	25,5	115	-	2-2	25	10	4.0225520
LMWP 185/150	185	150	19,0	17,0	25,5	115	-	2-2	25	10	4.0225530
LMWP 240/150	240	150	21,5	17,0	29,0	115	-	2-2	28	10	4.0225540
LMWP 240/185	240	185	21,5	19,0	29,0	115	-	2-2	28	10	4.0225550
LMWP 300/185	300	185	24,5	19,0	32,0	121	-	2-2	32	1	4.0225560
LMWP 300/240	300	240	24,5	21,5	32,0	121	-	2-2	32	1	4.0225570
LMWP 400/240	400	240	26,0	21,5	38,5	170	-	3-3	38	1	4.0225580
LMWP 400/300	400	300	26,0	24,5	38,5	170	-	3-3	38	1	4.0225590
LMWP 500/300	500	300	29,0	24,5	42,0	185	-	3-3	42	1	4.0225600
LMWP 500/400	500	400	29,0	26,0	42,0	185	-	3-3	42	1	4.0225610

Sektorové vodiče musia byť preformátované na kruhové.