


Al-Cu koncovky

LMAN - spojka redukčná (185-300mm²)

Materiál: Al-Cu
Povrchová úprava: nepocínované
Prevedenie: DIN 46235 a DIN 46329 (lisov. časť)

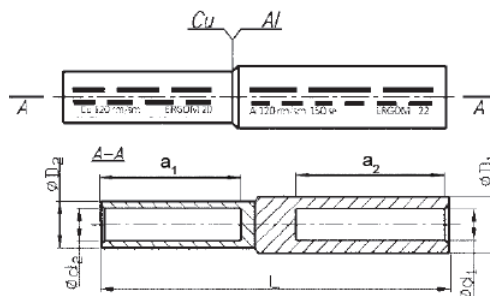

TYP	Prierez Al (mm ²)		Prierez Cu (mm ²) rm/sm	Rozmery (mm)								Počet lisov		Číslo hniezda	Počet lisov		Číslo hniezda	Balenie (ks)	Číslo produktu
	rm/sm	re/se		L	d ₁	D ₁	d ₂	D ₂	a ₁	a ₂	úzke	široké	úzke		široké				
LMAN 185/50	185	240	50	109	18,3	28,5	10,0	14,3	61	33	6	3	28	3	2	14	10	4.0229420	
LMAN 185/70	185	240	70	109	18,3	28,5	11,5	16,3	61	33	6	3	28	3	2	16	10	4.0229430	
LMAN 185/95	185	240	95	115	18,3	28,5	13,5	18,8	61	39	6	3	28	3	2	18	10	4.0229440	
LMAN 185/120	185	240	120	115	18,3	28,5	15,5	20,8	61	39	6	3	28	4	2	20	10	4.0229450	
LMAN 185/150	185	240	150	115	18,3	28,5	17,0	23,3	61	39	6	3	28	4	2	22	10	4.0229460	
LMAN 185/185	185	240	185	120	18,3	28,5	19,0	25,3	61	44	6	3	28	5	2	25	10	4.0229470	
LMAN 240/50	240	300	50	121	21,0	32,0	10,0	14,3	71	33	8	3	32	3	2	14	10	4.0229480	
LMAN 240/70	240	300	70	121	21,0	32,0	11,5	16,3	71	33	8	3	32	3	2	16	10	4.0229490	
LMAN 240/95	240	300	95	127	21,0	32,0	13,5	18,8	71	39	8	3	32	4	2	18	10	4.0229500	
LMAN 240/120	240	300	120	127	21,0	32,0	15,5	20,8	71	39	8	3	32	4	2	20	10	4.0229510	
LMAN 240/150	240	300	150	127	21,0	32,0	17,0	23,3	71	39	8	3	32	4	2	22	10	4.0229520	
LMAN 240/185	240	300	185	132	21,0	32,0	19,0	25,3	71	44	8	3	32	5	2	25	10	4.0229530	
LMAN 240/240	240	300	240	132	21,0	32,0	21,5	28,7	71	44	8	3	32	5	2	28	10	4.0229540	
LMAN 300/120	300	-	120	150	23,3	34,0	15,5	20,8	71	39	8	3	34	4	2	20	10	4.0229550	
LMAN 300/150	300	-	150	150	23,3	34,0	17,0	23,3	71	39	8	3	34	4	2	22	10	4.0229560	
LMAN 300/185	300	-	185	150	23,3	34,0	19,0	25,3	71	44	8	3	34	5	2	25	10	4.0229570	
LMAN 300/240	300	-	240	150	23,3	34,0	21,5	28,7	71	44	8	3	34	5	2	28	10	4.0229580	
LMAN 300/300	300	-	300	150	23,3	34,0	24,5	32,0	71	50	8	3	34	6	2	32	10	4.0229590	

Koncovky sú v Al časti plnené kontaktnou vazelinou. Sektorové vodiče musia byť preformátované na kruhovú.