





PRÍCHYTKY PRE VIAZACIE PÁSKY

SM - skrutkovacie; pre jednu pásku


Materiál: polyamid 6; bezhalogénové prevedenie od -40°C do +75°C
Pracovná teplota: od -40°C do +75°C
Farba: biela; čierna (.../S)
Trieda horľavosti: biela - UL94V2; čierna - UL94V0
Norma: EN-45545-2:2013+A1:2015




TYP	Rozmery (mm)					Balenie (ks)	Číslo produktu
	A	B	C	F	H		
SM-25 (E302)	16,0	26,0	5,0	9,8	11	100	3.0549600
SM-25/S (E302V0)	16,0	26,0	5,0	9,8	11	100	3.0549610
SM-55 (E3)	12,0	18,0	4,5	8,0	9	100	3.0549700
SM-55/S (E3V0)	12,0	18,0	4,5	8,0	9	100	3.0549710
SM-68 (E301)	10,7	16,0	3,7	5,4	7	100	3.0549800
SM-68/S (E301V0)	10,7	16,0	3,7	5,4	7	100	3.0549810





SM-2; SM-2/S

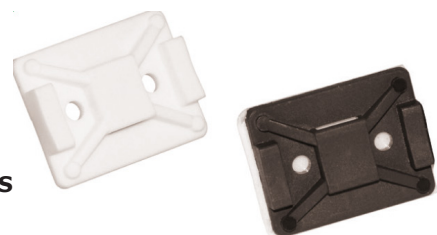

SM-4; SM-4/S

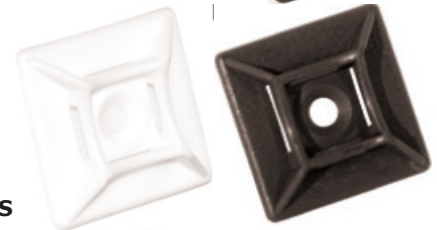

TYP	Rozmery (mm)			Skrutka	Balenie (ks)	Číslo produktu
	Dĺžka	Šírka	Výška			
SM-2 (E8)	32	25	6	2 x M3	100	3.0180180
SM-2/S (E8V0)	32	25	6	2 x M3	100	3.0180200
SM-4 (E8)	29	29	6	1 x M4	100	3.0180190
SM-4/S (E8V0)	29	29	6	1 x M4	100	3.0180210

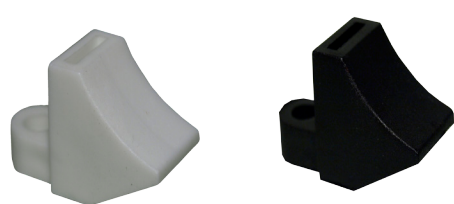

TYP	Rozmery (mm)	Pre šírku pásky (mm)	Pre skrutku (mm)	Balenie (ks)	Číslo produktu
SM-44 (E4)	26,5 x 12	do 8	M4	100	3.0180500
SM-44/S (E4V0)	26,5 x 12	do 8	M4	100	3.0180510