

MDW...H, MDW...HM - vývodky kovové PG a M

Materiál: telo: poniklovaná mosadz; tesnenie: neoprén CR;
tlačná vložka: PA6; tesniaci krúžok: guma NBR
bezhalogénové prevedenie

Pracovná teplota: od -40°C do +100°C

Stupeň ochrany: IP68





Norma: EN 62444, typ A



Tovar
na objednávku

TYP	Závit PG / M	Vonkajší priemer kábla	Rozmery (mm)		Rozmer kľúča (mm)		Balenie (ks)	Číslo produktu
			L	E	A	B		
MDW-7H	P7	3,0 - 6,5	20	6,0	14	14	10	3.0400651
MDW-9H	P9	4,0 - 8,0	21	6,0	17	17	10	3.0400652
MDW-11H	P11	5,0 - 10,0	22	6,0	20	20	10	3.0400653
MDW-13H	P13,5	6,0 - 12,0	22	6,5	22	22	10	3.0400654
MDW-16H	P16	10,0 - 14,0	24	6,5	24	24	10	3.0400655
MDW-21H	P21	13,0 - 18,0	28	7,0	30	30	10	3.0400656
MDW-29H	P29	18,0 - 25,0	32	8,0	40	40	10	3.0400657
MDW-36H	P36	22,0 - 32,0	38	10,0	50	50	10	3.0400658
MDW-42H	P42	30,0 - 38,0	42	12,0	58	58	1	3.0400659
MDW-48H	P48	34,0 - 44,0	44	14,0	64	64	1	3.0400660
MDW-12HM	M12x1,5	3,0 - 6,5	20	6	14	14	10	3.0400661
MDW-16HM	M16x1,5	4,0 - 8,0	21	7	17	18	10	3.0400662
MDW-20HM	M20x1,5	6,0 - 12,0	22	8	22	22	10	3.0400663
MDW-25HM	M25x1,5	10,0 - 14,0	24	8	24	27	10	3.0400664
MDW-32HM	M32x1,5	13,0 - 18,0	28	9	30	34	10	3.0400665
MDW-40HM	M40x1,5	18,0 - 25,0	32	9	40	43	10	3.0400666
MDW-50HM	M50x1,5	22,0 - 32,0	38	9	50	55	1	3.0400667
MDW-63HM	M63x1,5	34,0 - 44,0	44	14	64	68	1	3.0400668

Vývodka sa dodáva bez matice (MDN).

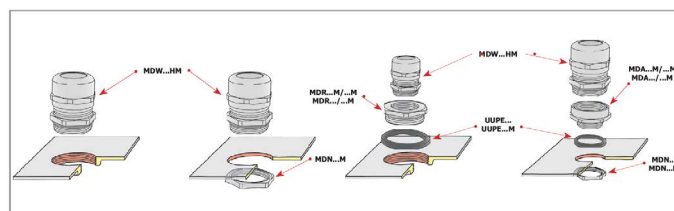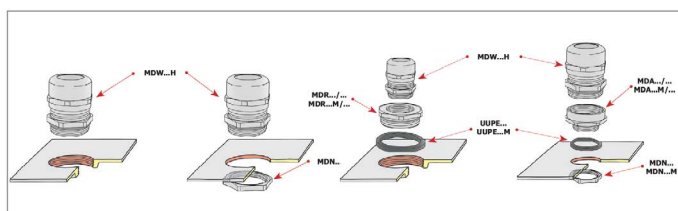

Na objednávku dodávame k vývodkám aj redukcie, adaptéry a záslepky.