


# Al koncovky

## LA - spojka rúrková

**Materiál:** Al  
**Povrchová úprava:** nepocínované  
**Prevedenie:** DIN 46267/2 (lisov. časť)  
**Norma:** EN 61238-1

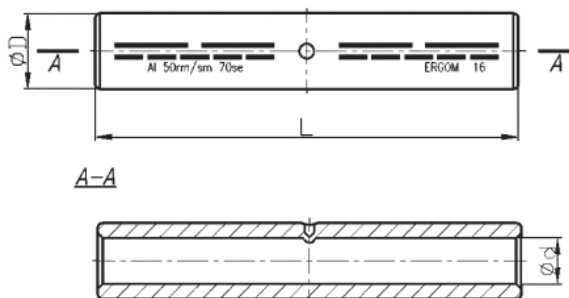

TYP	Prierez (mm <sup>2</sup> )		Rozmery (mm)			Počet lisov		Číslo hniezda	Balenie (ks)	Číslo produktu
	rm/sm	re/se	d	D	L	úzke	široké			
LA 10	10	16	5,0	10,0	55	3-3	1-1	10	1	4.0226500
LA 16	16	25	5,6	12,0	55	3-3	1-1	12	1	4.0226510
LA 25	25	35	6,8	12,0	70	4-4	2-2	12	1	4.0226520
LA 35	35	50	8,0	14,0	85	5-5	2-2	14	1	4.0226530
LA 50	50	70	9,8	16,0	85	5-5	2-2	16	1	4.0226540
LA 70	70	95	11,2	18,5	105	6-6	3-3	18	1	4.0226550
LA 95	95	120	13,2	22,0	105	6-6	3-3	22	1	4.0226560
LA 120	120	150	14,4	23,0	105	6-6	3-3	22	1	4.0226570
LA 150	150	185	16,3	25,0	125	7-7	3-3	25	1	4.0226580
LA 185	185	240	18,3	28,5	125	7-7	3-3	28	1	4.0226590
LA 240	240	300	21,0	32,0	145	8-8	3-3	32	1	4.0226600
LA 300	300	-	23,3	34,0	145	-	3-3	34	1	4.0226610

Koncovky sú plnené kontaktnou vazelinou. Sektorové vodiče musia byť preformátované na kruhové.